

ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICENET



Main Features

- Approvals:
 - ⊗ I M2 Ex db I/IIC T5 (mining)
 - ⊗ II 2 G/D Ex db IIC T5 Gb (surface)
- Heavy-duty industrial model
- Interface: Device Net
- Certified: by ODVA
- Max. 65536 steps per revolution (16 Bit)
- Max. 16384 revolutions (14 Bit)
- Code: Binary

Mechanical Structure

- Ex-proof, flameproof enclosure
- Flange and housing of Aluminum and Stainless Steel
- Shaft of stainless steel
- Precision ball bearings with sealing or cover rings
- Code disc made of unbreakable and durable plastic

Programmable Parameters

- Direction of rotation (complement)
- Resolution per revolution
- Total resolution
- Preset value
- Transmission mode:
 - Polled mode, Change of State, Cyclic

Electrical Features

- Connection via connection cap
- Temperature insensitive IR-opto-receiver-ASIC with integrated signal conditioning
- Polarity inversion protection
- Over-voltage-peak protection

ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICENET

Technical Data

Electrical Data

Interface	Transceiver according ISO/DIS 11898, up to 64 nodes galvanically isolated by opto-couplers
Transmission rate	150 kBaud, 250 kBaud, 500kBaud
Device addressing	Adjustable by rotary switches in connection cap
Supply voltage	10 – 30 V DC (absolute limits) ¹
Current consumption	max. 230 mA with 10 V DC, max. 100 mA with 24 V DC
Power consumption	max. 2.5 Watts
Step frequency LSB	800 kHz
Accuracy of division	± ½ LSB (12 bit), ± 2 LSB (16 bit)
EMC	Emitted interference: EN 61000-6-4
	Noise immunity: EN 61000-6-2
Electrical lifetime	> 10 ⁵ h

¹ Supply voltage according to EN 50 178 (safety extra-low voltage)

Mechanical Data

Housing	Anodize Aluminum, Stainless Steel 303 AISI, or Stainless Steel 316 AISI	
Max. shaft loading	Axial 50 N, radial 50 N	
Inertia of rotor	≤ 35 gcm ²	
Friction torque	IP65	≤ 0.01 Nm at 25°C
	IP67	≤ 0.03 Nm at 25°C
RPM max.	IP65/IP66/IP67	3,000 RPM
	IP55/IP64	6,000 RPM
Shock (EN 60068-2-27)	≤ 100 g (halfsine, 11 ms)	
Vibration (EN 60068-2-6)	≤ 10 g (10 Hz – 2,000 Hz)	
Weight (standard version)	Approx. 1200 g (Aluminum), Approx. 3100 g (Stainless Steel)	

Flange	Clamp (F)	Clamp (E)	Synchro (W)	Square (Z)
Shaft diameter	10 mm	14 mm	10 mm	10 mm
Shaft length	20 mm	8 mm	20 mm	20 mm

ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICE NET

Environmental Conditions

Operating temperature	- 40 to + 70°C
Storage temperature	- 40 to + 85 °C
Humidity	98 % (without liquid state)
Protection class (EN 60529)	IP65 & IP67 (others on request)

Note:

For ambient temperatures below -10°C and above +60°C use field wiring suitable for both minimum and maximum ambient temperature.

Ex-Protection

FRABA encoders type series EXAG are classified according to I M2 Ex db I/IIC T5 and II 2 G/D Ex db IIC T5:


ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICE NET

Interface

Installation connection cap

The rotary encoder is connected with two or three cables depending on whether the power supply is integrated into the bus cable or connected separately. If the power supply is integrated into the bus cable, one of the cable glands can be fitted with a plug (unused cable entries have to be closed with a blind plug-> accessories). Two cable glands are suitable for cable diameters from 8 up to 9.5 mm (bus cable), one cable gland is suitable for cable diameters from 6.5 up to 8 mm (power supply).

Follow the instructions in the installation manual carefully, otherwise the ATEX-certification will be repealed!

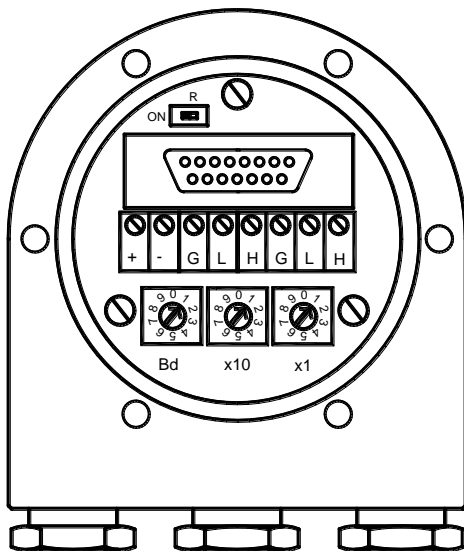

Clamp	Description
⊥	Ground
+	24 V Supply voltage
-	0 V Supply voltage
CG	CAN ground
CH	CAN high
CL	CAN low
CG	CAN ground
CH	CAN high
CL	CAN low


Configuration connection cap

The setting of the node number is achieved by 2 turn-switches in the connection cap. Possible addresses lie between 0 and 63 whereby every address can only be used once.

The baudrate is set with the third rotary switch in the cap.

The connection cap can be opened for installation by removing the six cap screws.

A termination resistor is integrated in the cap. The resistor must be switched on if the encoder is connected at the end or at the beginning of the bus:

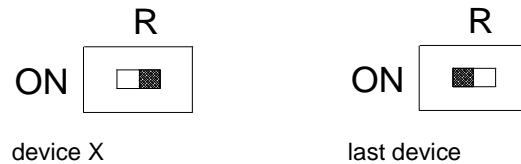

Separation of Bus In and Bus Out signals if termination resistor is activated.

ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICE NET

Programmable Encoder - Parameter


Operating Parameters	This parameter determines the counting direction, in which the output code increases or decreases.
Resolution per Revolution	The parameter resolution per revolution is used to program the desired number of steps per revolution. Each value between 1 and 4,096 can be programmed.
Total Resolution	This parameter is used to program the desired number of measuring units over the total measuring range. This value may not exceed the total resolution of the absolute rotary encoder. If the encoder is used in a continuous measuring application, certain rules for the setting of this parameter must be followed. These rules are outlined in the manual.
Preset Value	The preset value is the desired position value, which should be reached at a certain physical position of the axis. The position value is set to the desired process value by the parameter pre-set.

Programmable Transmission Modes



Polled Mode	By a telegram the connected host calls for the current process value. The absolute rotary encoder reads the current position value, calculates eventually set-parameters and sends back the obtained process value by the same identifier.
Change of State	The absolute rotary encoder transmits the actual process value. The process value is transmitted when the position changes. This is useful to reduce the bus activity.
Cyclic	The absolute rotary encoder transmits the actual process value event controlled by an internal timer. This is also useful to reduce the bus activity.

ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICENET



Mechanical Drawings

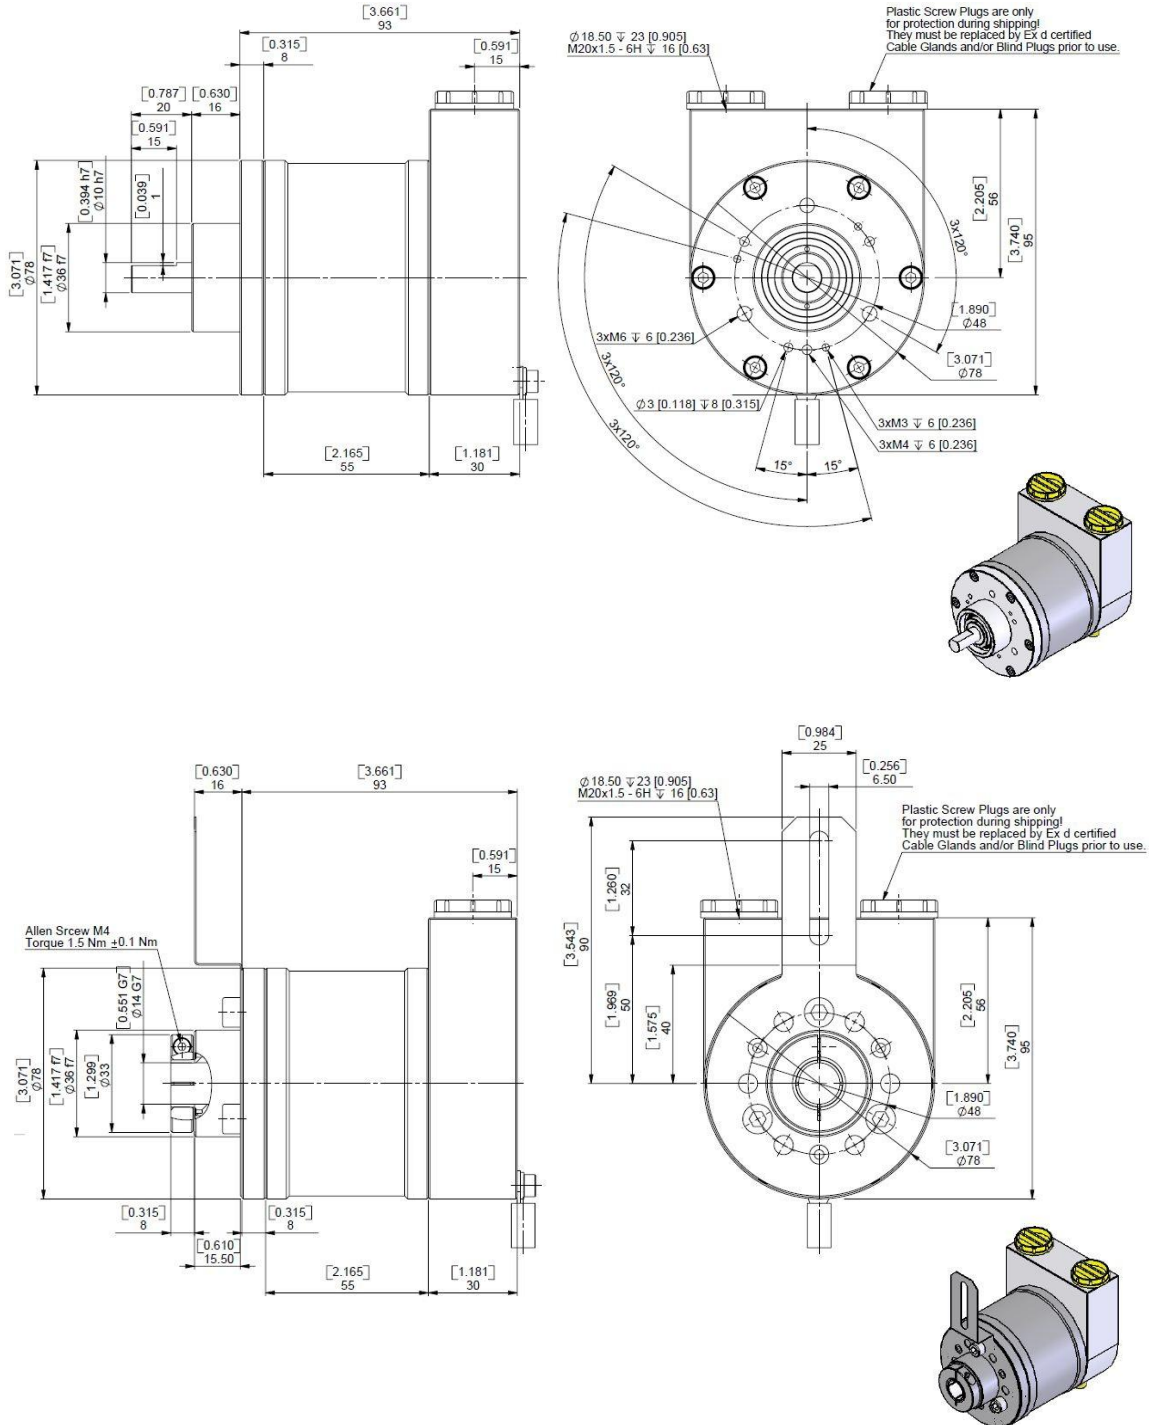





ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICE NET

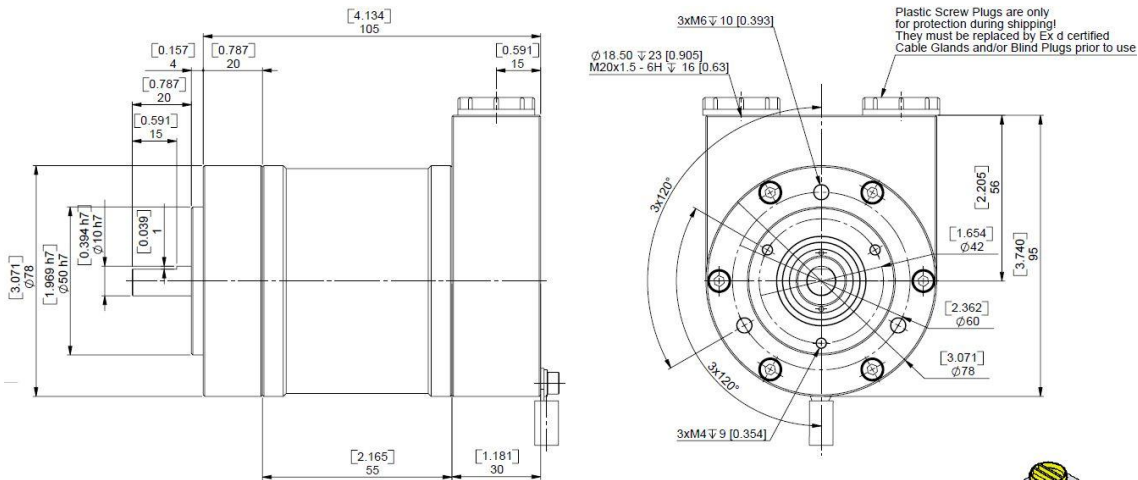

Connection Cap

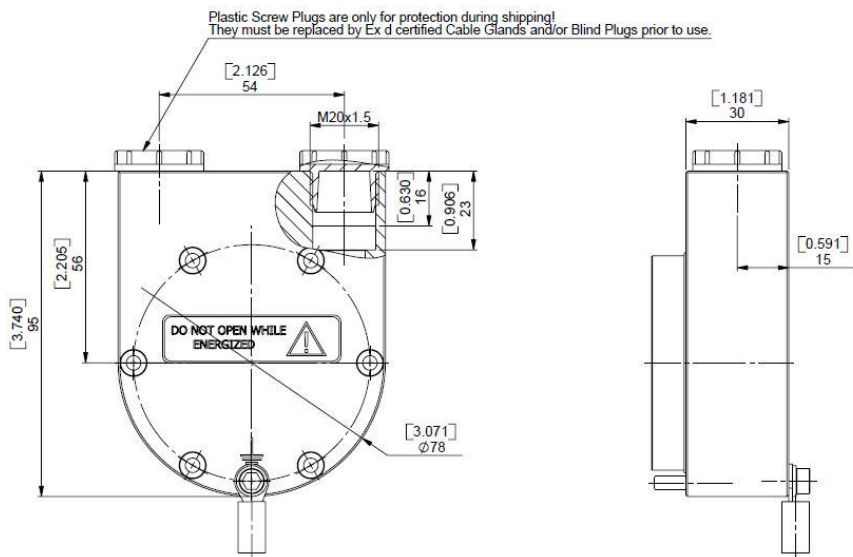

ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICE NET

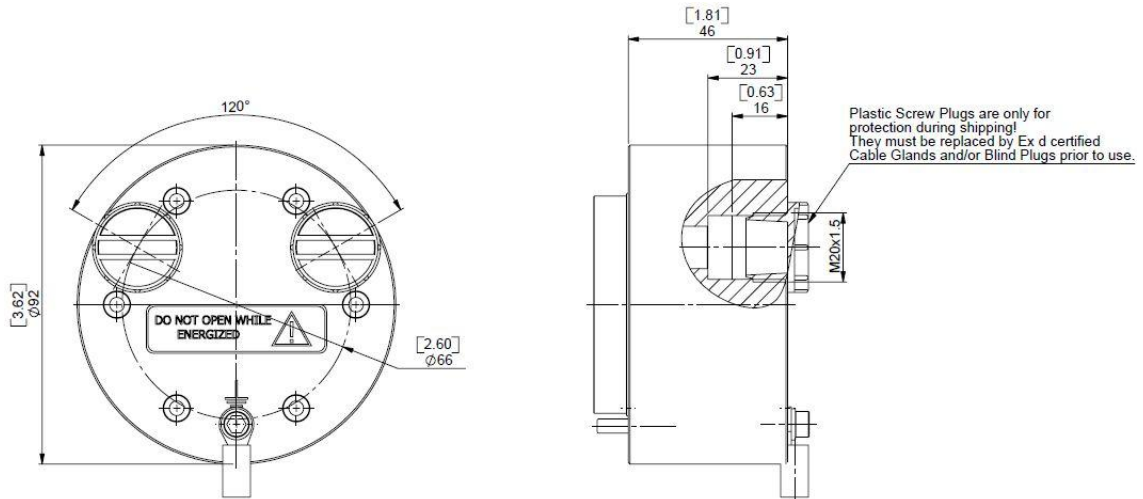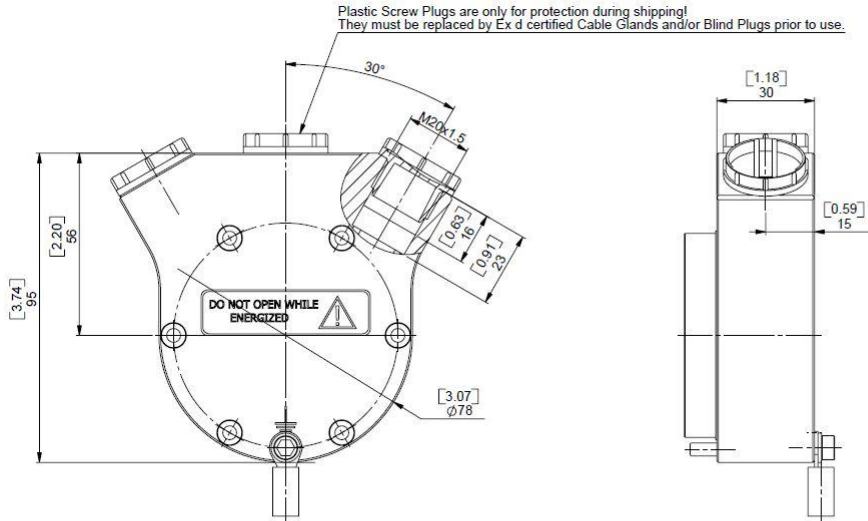

ABSOLUTE ROTARY ENCODER IXARC EXPLOSION PROOF DEVICE NET

Models / Ordering Description

Description	Type key											
Optocode	OC	-	D2	B1	B -	-	-	-	-	-	H	-
Atex certification Group I		M										
Atex certification Group II		E										
Interface	DeviceNet		D2									
Version				B1								
Code	Binary				B							
Revolutions (Bits)	Singleturn					00						
	Multiturn (4096 revolutions)					12						
	Multiturn (16384 revolutions)					14						
Steps per Revolution	4,096 (0.09°)							12				
(Bits)	8,192 (0.04°)							13				
	65,536 (0.005°)							16				
Flange & Shaft	Clamp flange with Solid Shaft								F			
	Clamp flange with Blind Hollow Shaft								E*			
	Synchro flange with Solid Shaft								W			
	Square flange with Solid Shaft								Z**			
Shaft diameter	10 mm (solid shaft)									10		
	12 mm (solid shaft)									12		
	14 mm (blind hollow shaft)									14		
Material & protection class	Anodize Aluminum (IP 65)										0	
	Anodize Aluminum (IP 67)										S	
	Stainless Steel 303 AISI (IP 67)										V	
	Stainless Steel 316 AISI (IP 67)										W	
Output type	Connection cap											H
Connection cap type	Radial Standard Connection Cap											FZ
	Radial Three Outlet Connection Cap											FE
	Axial Round Connection Cap											FG

*clamp ring and torque support set included

**available only in stainless steel

Standard = bold, further models on request

Accessories and Documentation

Description	Type
EDS-File ¹	Disc containing EDS-file for configuration.
Blind Plug	Blind plug for unused cable entries ATEX BL

¹ Can be downloaded free of charge from our homepage www.posital.eu

Disclaimer

© FRABA N.V. all rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.